

## 02-307F Series

From .56  $\mu$ H to 22  $\mu$ H



### CHARACTERISTICS

**Description:** SMD (shielded) power inductor.

**Applications:** PDA, Notebook, Desktop, Server applications, Low profile, high current power supplies, battery powered devices, DC/DC converter for Field Programmable Gate Array (FPGA).

**Operating Temperature:** -55°C to +125°C (The part temperature (ambient + temp. rise) should not exceed 125°C under worst case operating conditions. Circuit design, component placement, PWB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application)

**Inductance Tolerance:**  $\pm 20\%$

**Testing:** Inductance is tested on an HP4285A at 200KHz, 0.25V, 0A .

**Packaging:** Tape & Reel.

**Marking:** Parts are marked with inductance code.

**Miscellaneous:** **RoHS Compliant.**

**Additional Information:** Additional electrical & physical information available upon request.

**Samples available. See website for ordering information.**

### SPECIFICATIONS

Parts are available in  $\pm 20\%$  inductance tolerance only.


\*Irms DC current (A) that will cause an approximate  $\Delta T$  of 40°C.

\*\*Isat DC current (A) that will cause L0 to drop approximately 20%.

Part Number	Inductance ( $\mu$ H)	L Test Freq. (KHz)	DCR Max. (m $\Omega$ )	*Irms Typ. (A)	**Isat Typ. (A)
02-307F-R56M	0.56	200	2.5	22.0	40
02-307F-R68M	0.68	200	3.0	21.0	33
02-307F-R82M	0.82	200	3.5	20.0	30
02-307F-1R0M	1.00	200	4.0	18.0	28
02-307F-1R5M	1.50	200	6.5	16.0	20
02-307F-2R2M	2.20	200	8.5	13.0	19
02-307F-2R5M	2.50	200	9.5	12.0	16
02-307F-3R3M	3.30	200	11.5	11.0	16
02-307F-4R7M	4.70	200	16.0	8.0	14
02-307F-5R6M	5.60	200	23.5	8.0	12
02-307F-6R8M	6.80	200	25.5	7.5	11
02-307F-8R2M	8.20	200	31.0	7.0	10
02-307F-100M	10.0	200	42.0	5.0	8
02-307F-220M	22.0	200	92.0	3.5	6

### PHYSICAL DIMENSIONS

Size	A Max.	B Max.	C Max.	D	E Ref.	F Ref.
mm	11.5	10.2	4.0	4.1 $\pm$ 0.2	6.3	2.2
inches	0.45	0.40	0.16	0.161 $\pm$ 0.008	0.25	0.09

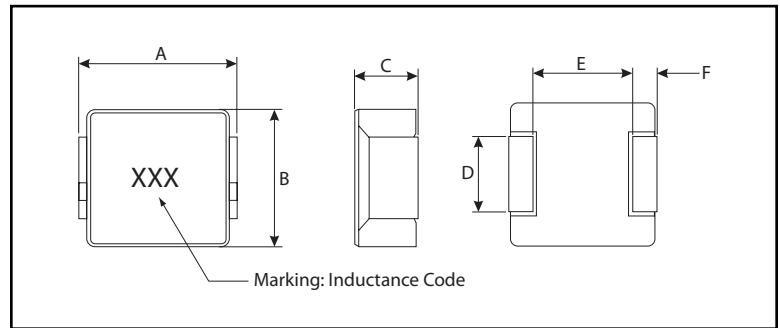

### PAD LAYOUT

