


## TOKO #4DFA-1575B-12 alternative

### ► Electrical Specifications

Item		Specifications
1	Center Frequency (fo)	1575.4MHz
2	Band Width	fo ±5.0[1570.4~1580.4]MHz
3	Insertion Loss In BW	1.05dB Max.
4	Ripple	0.35dB Max
5	V.S.W.R (Ratio)	1.85:1 Max
6	Attenuation (Absolute Value)	21.5dB Min. @ fo – 140.0 MHz
		18.4dB Min. @ fo + 140.0 MHz
7	In/Out Impedance	50Ω
8	Operation Temperature Range	-40°C to +85°C

### ► Dimensions

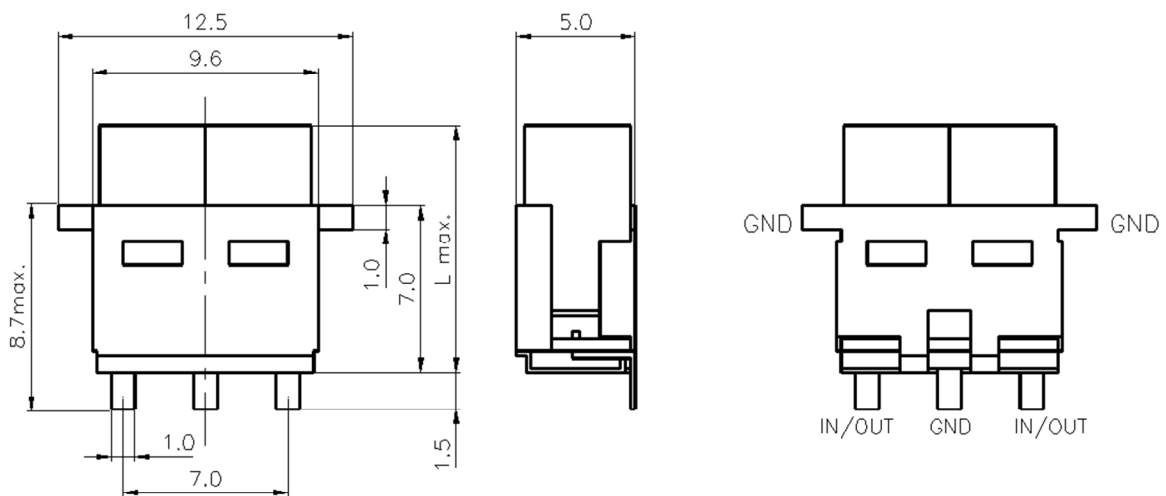

L=12.5mm max.