


TOKO #4DFB-1575D-10 alternative

Electrical Specifications

| Item | Specifications |
|------|--|
| 1 | Center Frequency (fo) 1575.4MHz |
| 2 | Band Width fo ±10.0[1565.4~1585.4]MHz |
| 3 | Insertion Loss In BW 2.98dB Max. |
| 4 | Ripple 0.85dB Max |
| 5 | V.S.W.R (Ratio) 1.85:1 Max |
| 6 | 13.9 dB Min. @ fo – 35.0 MHz |
| | 44.9 dB Min. @ fo – 140.0 MHz |
| | 13.9 dB Min. @ fo + 35.0 MHz |
| | 44.9 dB Min. @ fo + 140.0 MHz |
| 7 | In/Out Impedance 50Ω |
| 8 | Operation Temperature Range -40°C to +85°C |

Dimensions

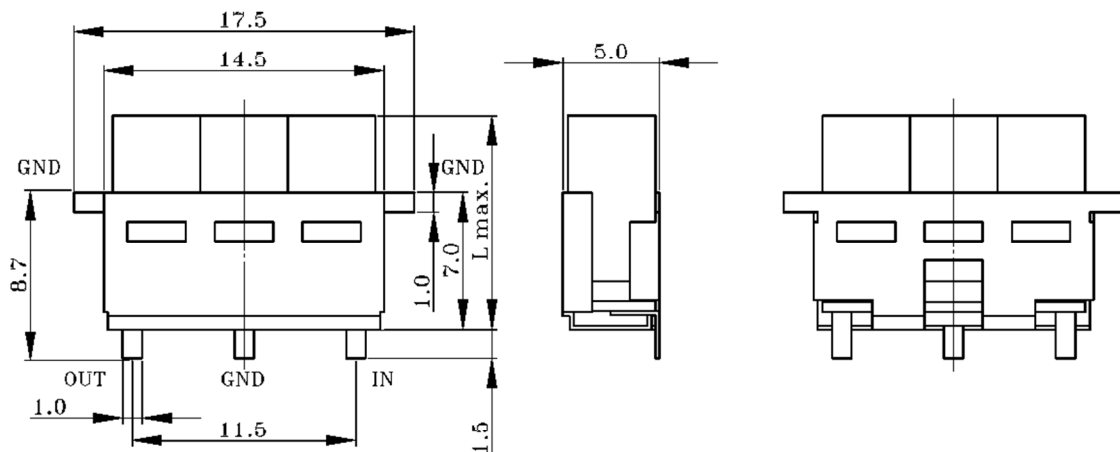

L=10.5mm max.