

# TOKO D52FU alternative



Fixed Inductors for Surface Mounting



#875FU-682M cross to BECCM5020S-6R8M-LF

RoHS Compliant

## SPECIFICATION APPROVAL

CUSTOMER : BEC

---

PRODUCT : BECCM5020S-6R8M-LF

---

Pb-free

---

CODE NO. : C03050021

---

CUS. CODE :

---

SPEC.NO. : C-3050-021(02)

---

DATE : 15-May-12

---

CUSTOMER APPROVAL

### **BEC DISTRIBUTION LIMITED**

4 EDGING LANE, WINDSOR PARK, BUCKINGHAM  
BUCKINGHAMSHIRE MK18 7SD


UK

T: +44 (0) 1844 275824

PREPARED BY	APPROVED BY	AUTHORIZED BY
JEAN	TONY	MASCOT

PRODUCT	BECCM5020S-6R8M-LF	<b>COIL SPECIFICATION</b>	DATE	2012/5/15
SPEC.NO.	C-3050-021(02)		CODE NO.	C03050021


**EXTERNAL DIMENSIONS :**

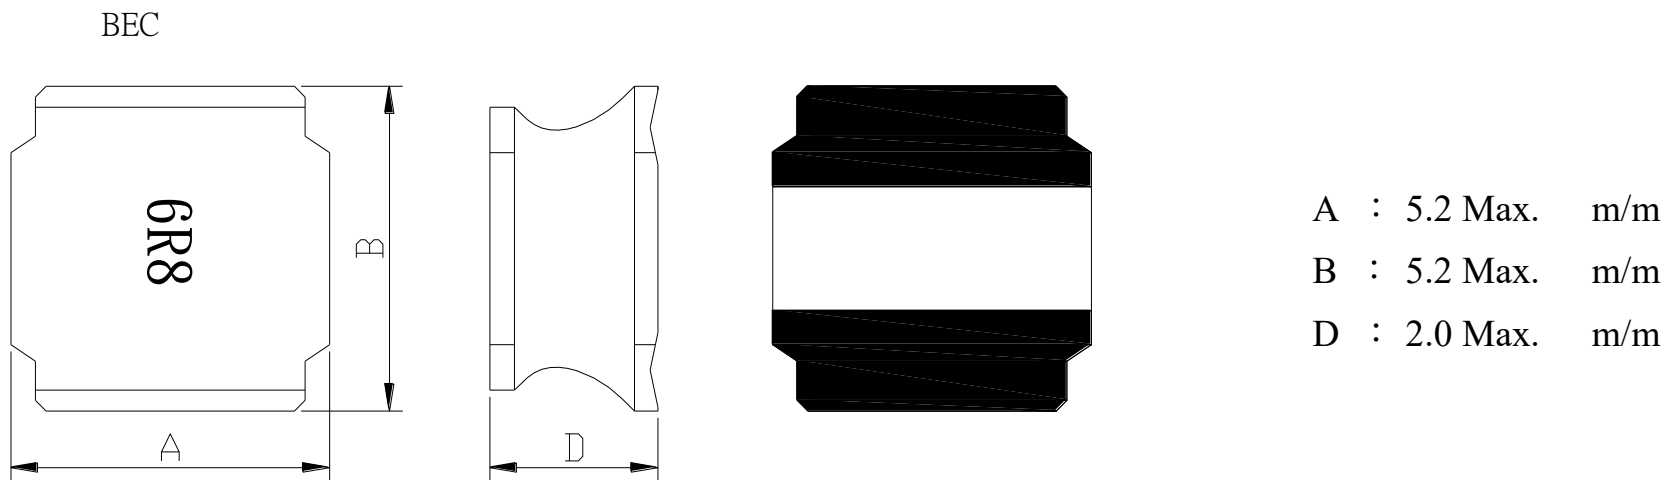

**ELECTRICAL CHARACTERISTIC :**


L( $\mu$ H)	:	6.8 $\pm$ 20%	100KHz 0.25v
DCR(m $\Omega$ )	:	119.6	Max.
Isat(A)	:	2.10	Max. ( L2.1A MAX $\geq$ 0Ax70% )
INDUCTANCE DROP :		30% Typ. @ IDC	2.1 A

**SCHEMATIC DRAWING :**

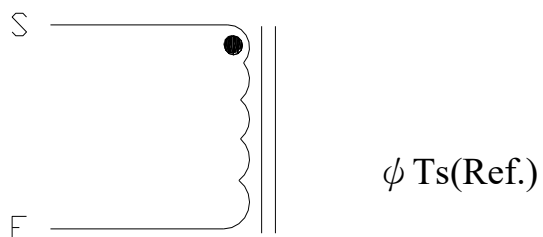

"●" START FOR STAND

**PCB PATTERN :**

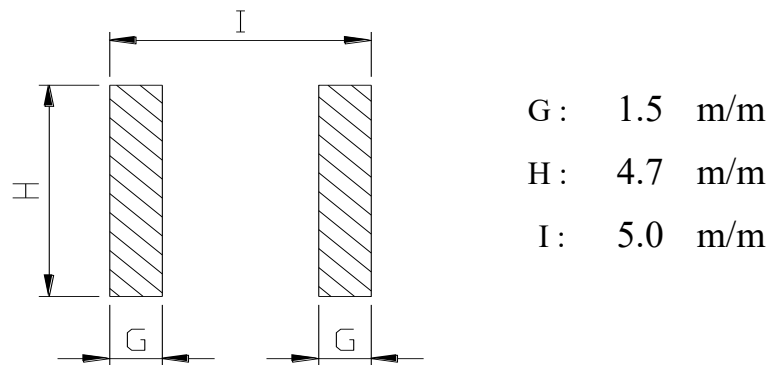

**MATERIAL LIST :**

NO	ITEM	MATERIAL	SUPPLIER OF THE MATERIAL
1			
2			
3			
4			


<b>PRODUCT</b>	BECCM5020S-6R8M-LF	<b>COIL SPECIFICATION</b>	<b>DATE</b>	2012/5/15
<b>SPEC.NO.</b>	<b>C-3050-021(02)</b>		<b>CODE NO.</b>	<b>C03050021</b>

**TEST DATA**

BEC

ELECTRICAL CHARACTERISTICS								
MEAS. ITEM	L(μH)	DCR(mΩ)	Isat(A)					
TEST FREQ.	100KHz 0.25v	Max.	Max.					
YOUR			L(2.1A)					
SPEC.	6.8±20%	119.6	≥ 0Ax70%					
1								
2								
3								
4								
5								
6								
7								
8								
9								
10								
X	#DIV/0!	#DIV/0!	#DIV/0!					
R	0.00	0.00	0.00					

DIMENSION								
MEAS. ITEM	A	B	C	D				
TEST FREQ.	m/m	m/m	m/m	m/m				
YOUR								
SPEC.	5.2 Max.	5.2 Max.		2.0 Max.				
1								
2								
3								
4								
5								
6								
7								
8								
9								
10								
X	#DIV/0!	#DIV/0!		#DIV/0!				
R	0.00	0.00		0.00				

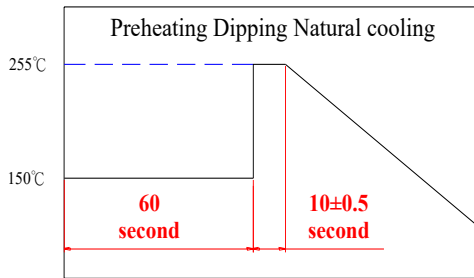PRODUCT	BECCM5020S-6R8M-LF	COIL SPECIFICATION	DATE	2012/5/15
SPEC.NO.	C-3050-021(02)		CODE NO.	C03050021
TEST ITEMS	SPECIFICATIONS	TEST CONDITIONS / TEST METHODS		
<b><u>ELECTRICAL PERFORMANCE TEST</u></b>				
L	REFER TO STANDARD ELECTRICAL CHARACTERISTIC LIST.	CH-1061 OR EQUIV.		
DCR		CH-502A OR EQUIV		
RATED CURRENT		APPLIED THE CURRENT TO COILS THE INDUCTANCE CHANGE SHOULD BE LESS THAN 30% TO INITIAL VALUE AND TEMPERATURE RISE SHOULD NOT BE MORE THAN 40°C..		
TEMPERATURE RISE TEST		40°C MAX ( $\Delta t$ )	1. APPLIED THE ALLOWED DC CURRENT FOR 4 HOURS 2. TEMPERATURE MEASURE BY DIGITAL SURFACE THERMOMETER.	
OVER LOAD TEST	NO EVIDENCE OF ELECTRICAL DAMAGE	APPLIED 1.5 TIMES OF RATED ALLOWED DC CURRENT TO INDUCTORS FOR A PERIOD OF 5 MINUTES.		
<b><u>MECHANICAL PERFORMANCE TEST</u></b>				
SOLDER HEAT RESISTANCE	1. INDUCTORS SHOULD HAVE NO EVIDENCE OF ELECTRICAL AND MECHANICAL DAMAGE 2. INDUCTANCE SHOULD NOT CHANGE MORE THAN $\pm 10\%$ 3. SOLDER MATERIAL WILL BE LEAD FREE.	PREHEAT:150°C 60SECS  SOLDER TEMPERATURE: 255 $\pm$ 5°C FLUX: ROXIN.. DIP TIME:10 $\pm$ 0.5SECS.		
VIBRATION TEST (LOW FREQUENCY)				
SHOCK TEST		INDUCTORS SHOULD BE DROPPED 10 TIMES FROM A HEIGHT OF 1m ONTO 3cm WOODEN BOARD.		
		1.AMPLITUDE: 1.5 mm 2.FREQUENCY: 10-55-10HZ / 1 MIN 3.DIRECTION: X, Y, Z 4.DURATION: 2 HRS/X, Y, Z		

PRODUCT	BECCM5020S-6R8M-LF	COIL SPECIFICATION	DATE	2012/5/15
SPEC.NO.	C-3050-021(02)		CODE NO.	C03050021
TEST ITEMS	SPECIFICATIONS	TEST CONDITIONS / TEST METHODS		
<b><u>MECHANICAL PERFORMANCE TEST</u></b>				
SOLDERABILITY TEST	MORE THAN 90% OF TERMINAL ELECTRODE SHOULD BE COVERED WITH SOLDER.	AFTER FLUXING, INDUCTOR SHALL BE DIPPED IN A MELTED SOLDER BATH AT 255±5°C FOR 5 SECONDS		
COMPONENT ADHESION ( PUSH TEST )	1.5Kg Min	THE DEVICE SHOULD BE REFLOW SOLDERED ( 255±5°C FOR 10 SECONDS ) TO A TINNED COPPER SUBSTRATE. A DYNOMETER FORCE GAUGE SHOULD BE APPLIED TO THE SIDE OF THE COMPONENT. THE DEVICE MUST WITH- STAND A MINIMUM FORCE OF 1.5Kg WITHOUT AILURE OF THE TERMINATION . ATTACHED TO COMPONENT.		
COMPONENT ADHESION ( PULL TEST )	1.5Kg Min	1.INSERT 10cm WIRE INTO THE REMAINING OPEN EYE BEND THE ENDS OF EVEN WIRE LENGTHS UPWARD AND WIND TOGETHER 2. TERMINAL SHALL NOT BEREMARKABLY DAMAGED		
FLEXTURE STRENGTH	THE FORCES APPLIED SHOULD NOT DAMAGE THE DIELECTRIC.	SOLDER A CHIP ON A TEST SUBSTRATE, BEND THE SUBSTRATE BY 2mm AND RETURN.		
RESISTANCE TO SOLVENT TEST	THERE SHOULD BE NO CASEDEFORMATION, CHANGE IN APPEARANCE OR BITERATION OF MARKING	INDUCTERS SHALL WITHSTAND 6 MINTES OF ALCOHOL		

<b>PRODUCT</b>	BECCM5020S-6R8M-LF	<b>COIL SPECIFICATION</b>	<b>DATE</b>	<b>2012/5/15</b>
<b>SPEC.NO.</b>	<b>C-3050-021(02)</b>		<b>CODE NO.</b>	<b>C03050021</b>

TEST ITEMS	SPECIFICATIONS	TEST CONDITIONS / TEST METHODS
------------	----------------	--------------------------------

**CLIMATIC TEST**

TEMPERATURE CHARACTERISTIC	1.APPEARANCE:NO DAMAGE  2.INDUCTANCE:WITHIN±10% OF INITIAL VALUE.	- 40°C ~ +125°C	
HUMIDITY TEST		60°C±2°C / 96±2 HOURS	
LOW TEMPERATURE STORAGE		1.TEMPERATURE:- 25°C±2°C 2.TIME: 96±2 HOURS	
THERMAL SHOCK TEST		1.-25±5°C FOR 30 MINUTES. +80±5°C FOR 30 MINUTES 2.TOTAL: 10 CYCLES	
HIGH TEMPERATURE STORAGE		1.APPLIED CURRENT: MAX RATED CURRENT 2.TEMPERATURE:80°C±2°C	

NOTE : INDUCTORS ARE TO BE TESTED AFTER 2 HOUR AT ROOM TEMPERATURE.

**LIFE TEST**

HIGH TEMPERATURE LOAD LIFE TEST	INDUCTORS SHOULD BE NO EVIDENCE OF SHORT OR OPEN CIRCUIT	1. TEMPERATURE: 80±2°C 2. TIME: 500±12 HOURS 3. LOAD: ALLOWED DC CURREN
HUMIDITY LOAD LIFE TEST		1. TEMPERATURE: 60±2°C 2. R.H.: 90-95% 3. TIME: 500±12 HOURS 4. LOAD: ALLOWED DC CURREN

<b>PRODUCT</b>	BECCM5020S-6R8M-LF	<b>COIL SPECIFICATION</b>	<b>DATE</b>	<b>2012/5/15</b>
<b>SPEC.NO.</b>	<b>C-3050-021(02)</b>		<b>CODE NO.</b>	<b>C03050021</b>


**RECOMMENDED SOLDERING CONDITIONS :**

CLASSIFICBEC

Profile Feature	Sn-Pb Eutectic Assembly		Pb-Free Assembly	
	Large Body	Small Body	Large Body	Small Body
Average ramp-up rate ( $T_L$ to $T_P$ )	3°C/second max.		3°C/second max.	
Preheat -Temperature Min ( $T_{s_{min}}$ ) -Temperature Min ( $T_{s_{max}}$ ) -Time (min to max) (ts)	100°C 150°C 60-120 seconds		150°C 200°C 60-180 seconds	
$T_{s_{max}}$ to $T_L$ -Ramp-up Rate			3°C/second max.	
Time maintained above: -Temperature ( $T_L$ ) -Time ( $t_L$ )	183°C 60-150 seconds		217°C 60-150 seconds	
Peak Temperature ( $T_p$ )	225 +0/-5°C	240 +0/-5°C	245 +0/-5°C	255 +5/-5°C
Time within 5°C of actual Peak Temperature ( $t_p$ )	10-30 seconds	10-30 seconds	10-30 seconds	20-40 seconds
Ramp-down Rate	6°C/second max.		6°C/second max.	
Time 25°C to Peak Temperature	6 minutes max.		8 minutes max.	

Note : All temperatures refer t topside of the package. Measured on the package body surface.


REFLOW SLODERINGS

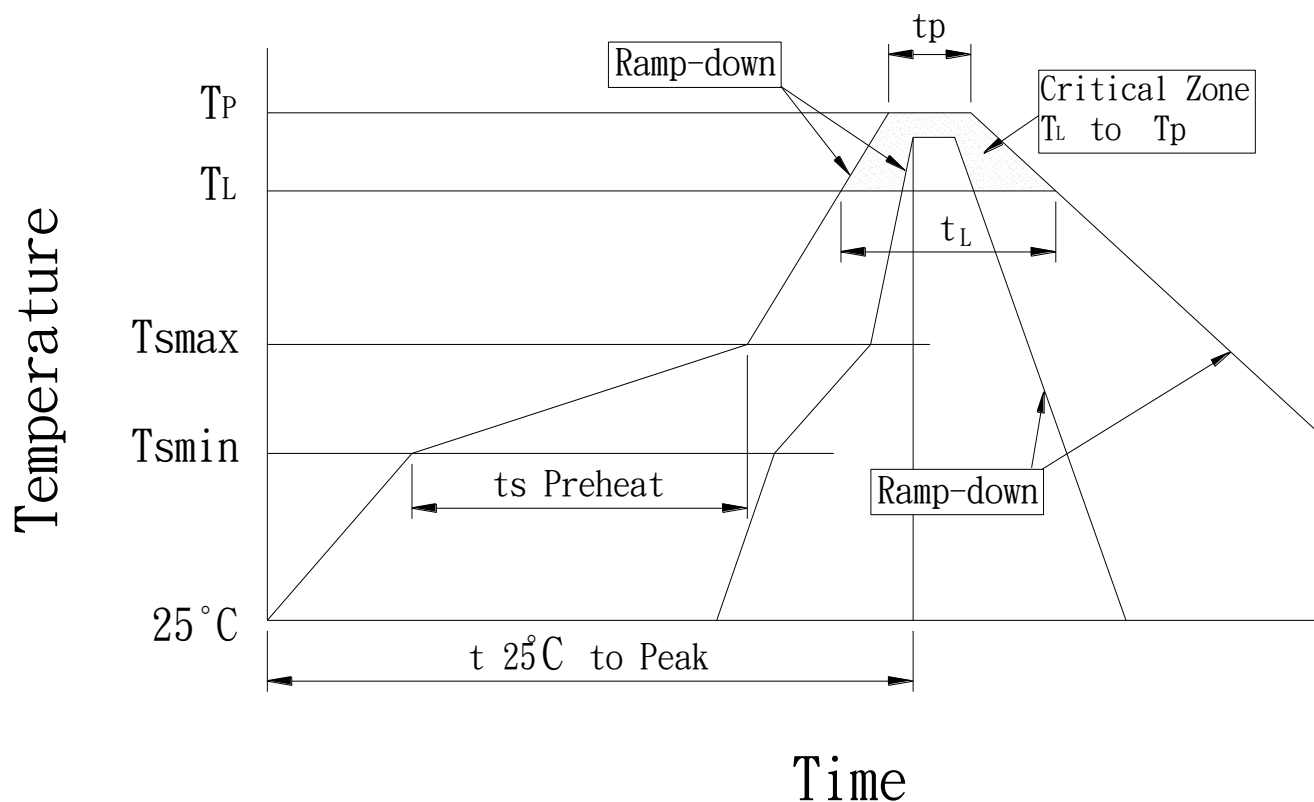


PRODUCT	BECCM5020S-6R8M-LF	<b>COIL SPECIFICATION</b>	DATE	2012/5/15
SPEC.NO.	C-3050-021(02)		CODE NO.	C03050021

**PACKAGE :**

BEC

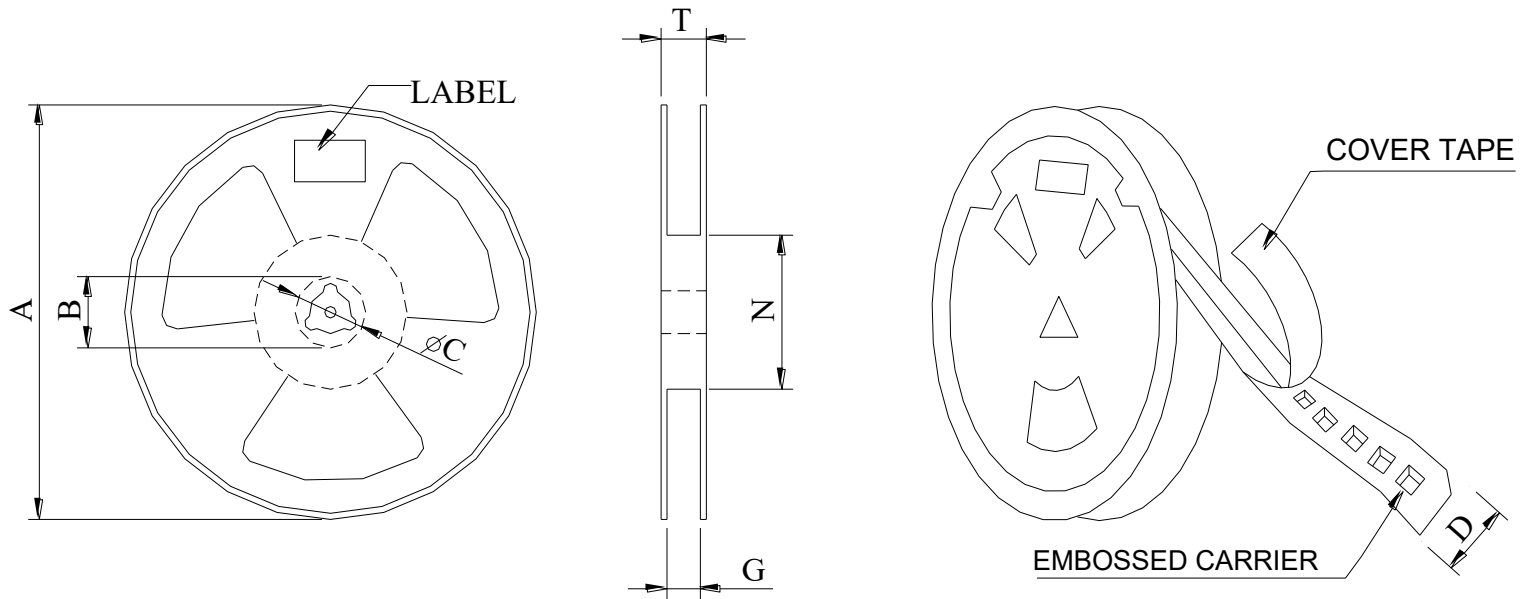

\*CARRIER TAPE WIDTH : D

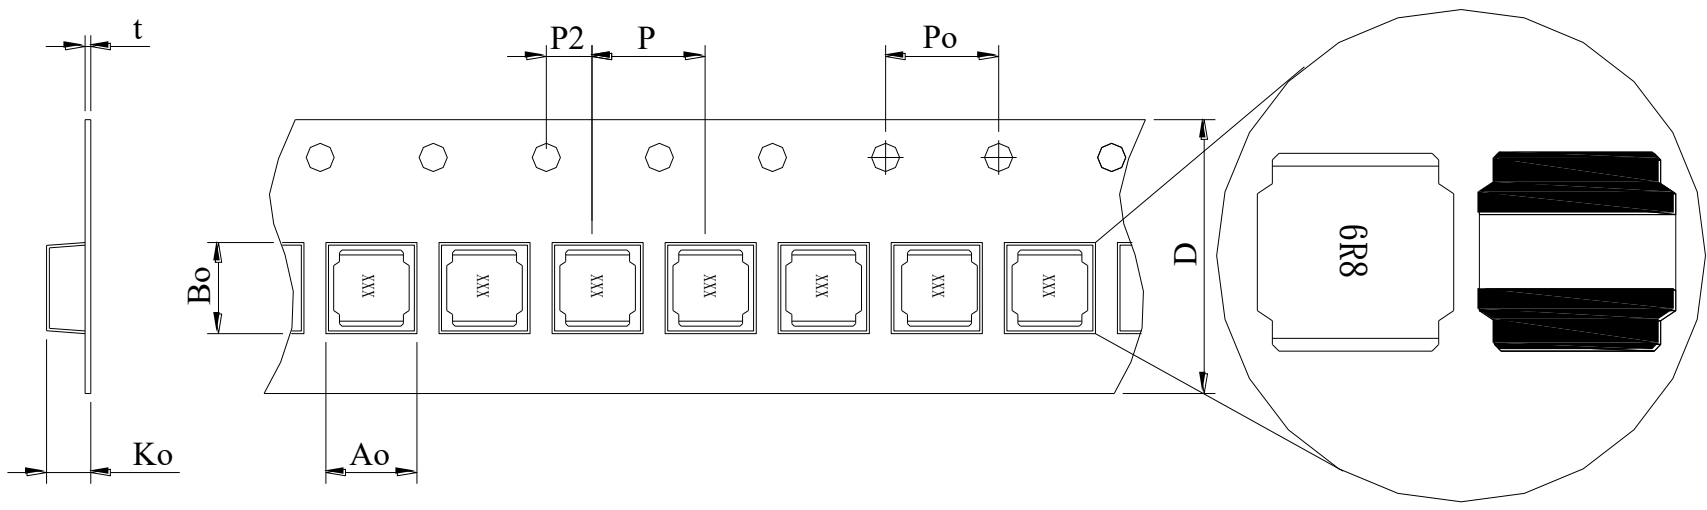


REEL"	DIMENSIONS (m/m)														
	Q'TY (PCS)	A	B	C	D	G	N	T	Ao	Bo	Ko	t	P	Po	P2
13"	2500	330	—	—	12	16.4	80	—	—	—	—	0.35	8	4	2




<b>PRODUCT</b>	BECCM5020S-6R8M-LF	<b>COIL SPECIFICATION</b>	<b>DATE</b>	2012/5/15
<b>SPEC.NO.</b>	<b>C-3050-021(02)</b>		<b>CODE NO.</b>	<b>C03050021</b>

**TABLE :**

BEC

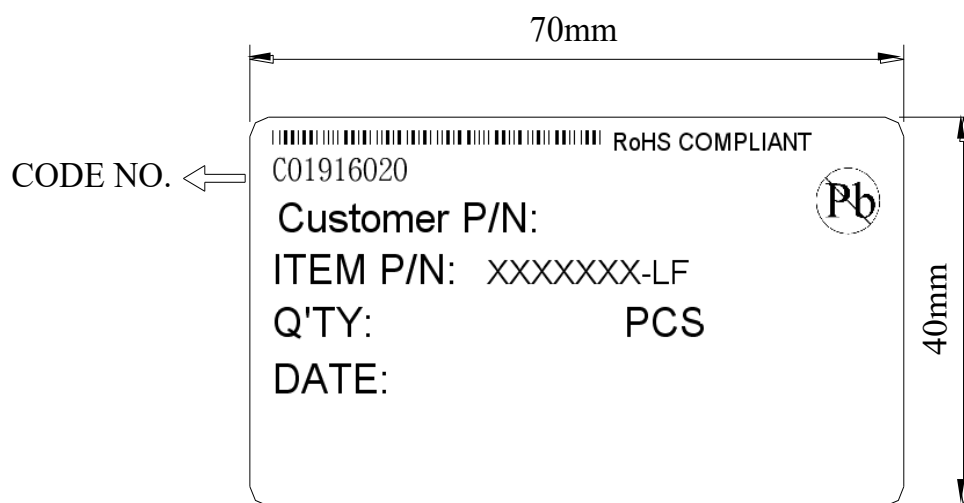

INNER BOX LABEL

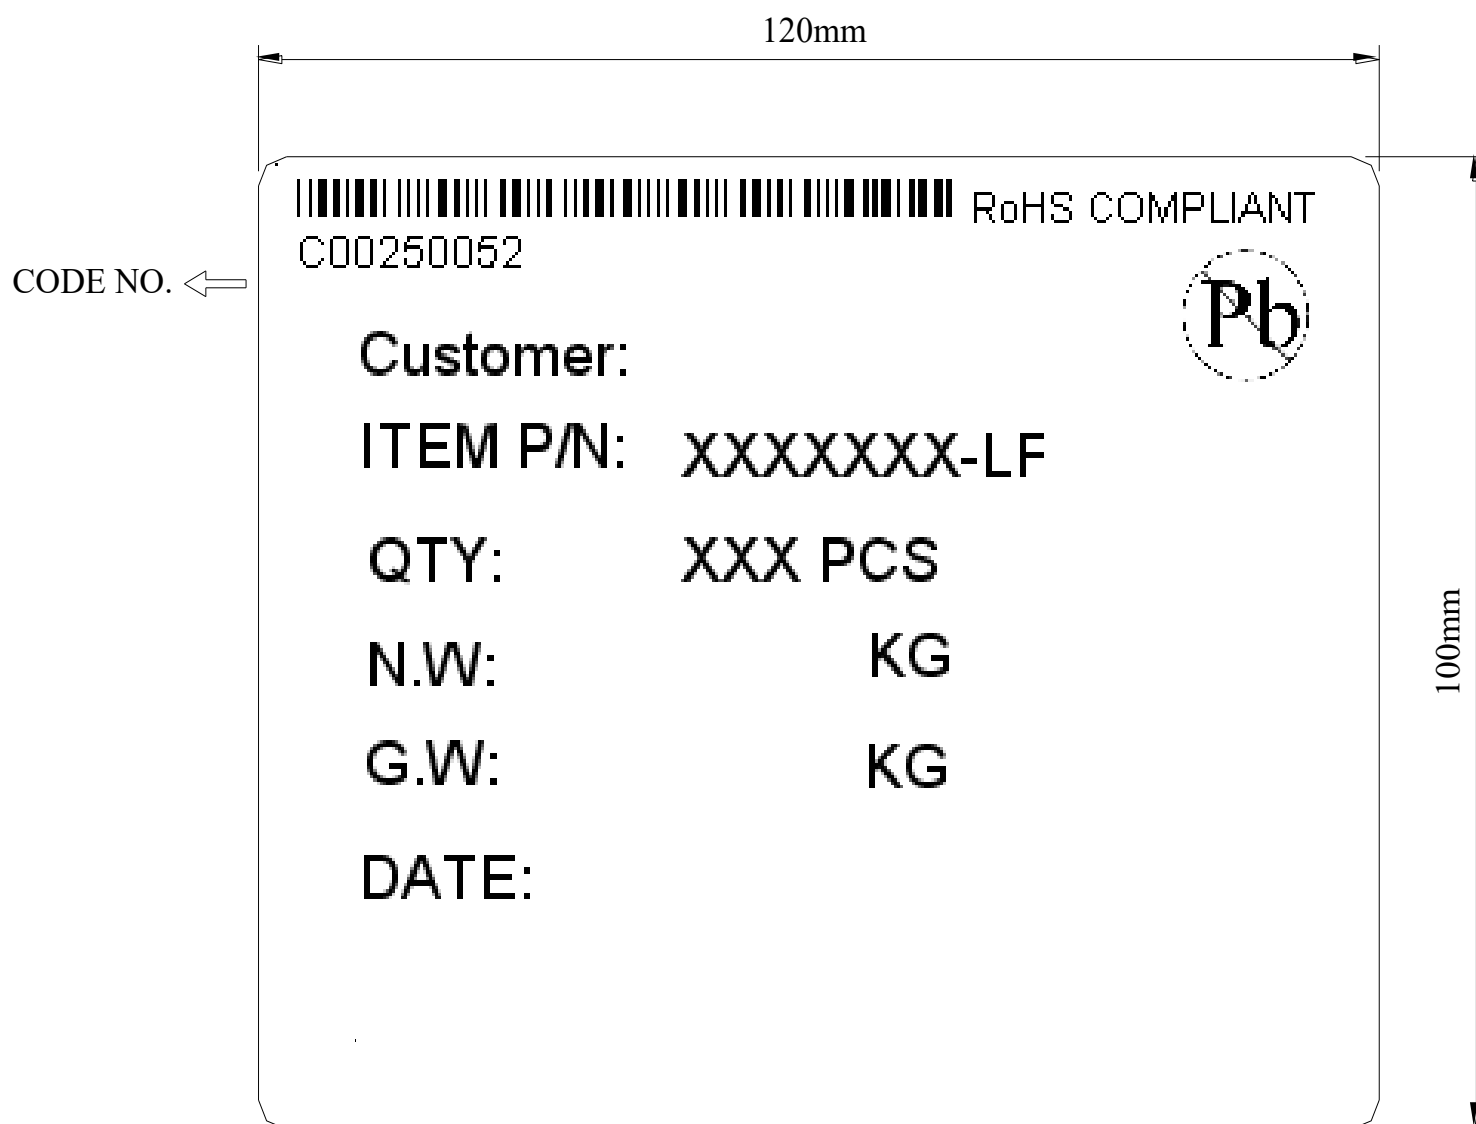

OUT BOX LABEL