

PCB LAYOUT

Material

Screw: M4.0, steel, Zn plated
 Cage: Brass, Nickel plated
 Pin header: Brass, Tin plated
 Housing: PA66, UL94V-0



Electrical


Rated voltage: 600V
 Rated current: 60A
 Wire range: 20 ~ 6AWG 10mm²
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC1000V
 Withstand voltage: AC2500V / 1 min

Mechanical

Temp. Range: -40 °C ~ +105 °C
 Soldering: 250 °C 5Sec. Max.
 Torque: 1.2 Nm (10.5 Lb.) in
 Strip length: 9 ~ 10 mm

Order Information

RE - C - 149 - 10.16 - XXP - 4 S XX

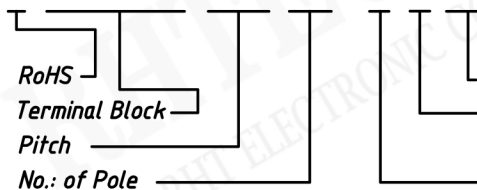

Product Code: 00 ~ 99
 Screw: S- Slot Screw
 Color: 1- Gray
 3- Black
 4- Green



NINGBO RHT ELECTRONIC CO., LTD

UNITS:mm

SHEET SIZE:A4

SCALE: ---



> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

TERMINAL BLOCK