


SECTION:A-A

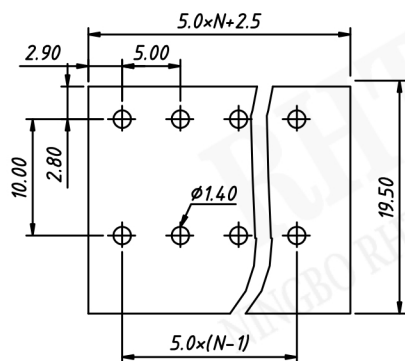

PCB LAYOUT

Material
Housing: PA66, UL94V-0
Clamp: Steel Zinc plated
Pin Header: Brass, Tin plated
Screw: M2.5, steel Zinc plated

Electrical
Rated voltage: 300V
Rated current: 20A
Contact Resistance: 20 mΩ
Insulation resistance: 500MΩ/DC500V
Withstand voltage: AC2000V / 1 min
Wire Range: 24~14AWG 2.5mm²

Mechanical
Temp. Range: -40 °C ~ + 105 °C
Strip length: 12~13mm
Torque: 0.4Nm (3.5Lb.in)

Order Information

RE - C - 147R -5.00-XXP-4 S 00
RoHS
Terminal Block
Pitch
No.: of Pole
Color: 4- Green
Screw: S-Slot Screw
Product Code: 00~99




NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE:A4

SCALE: ---



First angle projection

> 0~ 3

> 3~ 18

> 18~ 50

> 50~ 120

± 0.12

± 0.15

± 0.3

± 0.5

TERMINAL BLOCK