

Material

Housing: PA66, UL 94V-0
 Clamp: Steel Zinc plated
 Pin Header: Brass, Tin plated
 Screw: M2.5, steel Zinc plated

Electrical

Rated voltage: 300V
 Rated current: 20A
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1 min
 Wire Range: 24 ~ 14AWG 2.5mm²


Mechanical

Temp. Range: -40 °C ~ +105 °C
 Strip length: 12 ~ 13mm
 Torque: 0.4Nm (3.5Lb.in)

Order Information

RE - C - 146R - 5.00 - XXP - 4 S 00

RoHS
 Terminal Block
 Pitch
 No. of Pole
 Color: 4- Green
 Screw: S-Slot Screw
 Product Code: 00 ~ 99

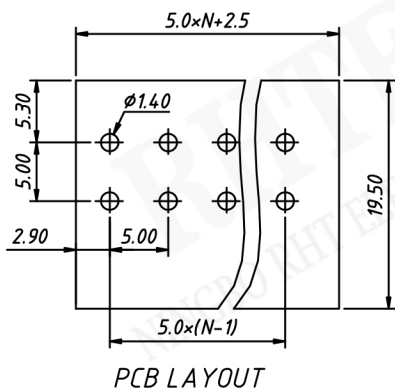

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE:A4

SCALE: ---



> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

TERMINAL BLOCK