

RE - C -EDAR-2.50&2.54 Pluggable Terminal Block 2.50&2.54mm Pitch

Electrical :

Rated voltage: 125V
 Rated current: 4A
 Contact resistance: 20mΩ
 Insulator Resistance: 5000MΩ/1000V
 Withstanding Voltage: AC1250V/1Min
 Temp. Range: -40°C~+105°C

Material:

Housing: PA66, UL94V-0
 Pin header: Brass, Tin Plated

N=Number of Poles

Dim P= $(N-1) \times 2.50$

Dim L= $(N-1) \times 2.50 + 4.4$

Poles	Dim	Dim P	Dim L
2-6P		±0.10	±0.15
7-12P		±0.20	±0.20
13-18P		±0.25	±0.30
19-24P		±0.30	±0.40

Product NO.: **RE - C** -EDAR-2.54-XX-1




NINGBO RHT ELECTRONIC CO., LTD

UNITS : mm

SHEET SIZE : A4

SCALE : ---



> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120



± 0.12

± 0.15

± 0.3

± 0.5

TERMINAL BLOCK

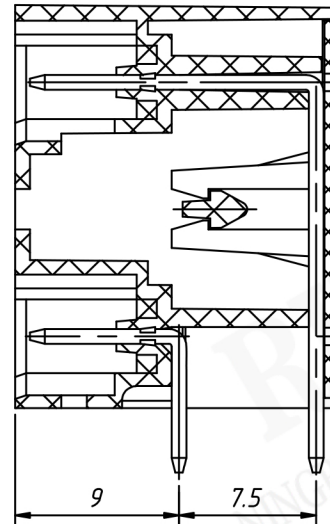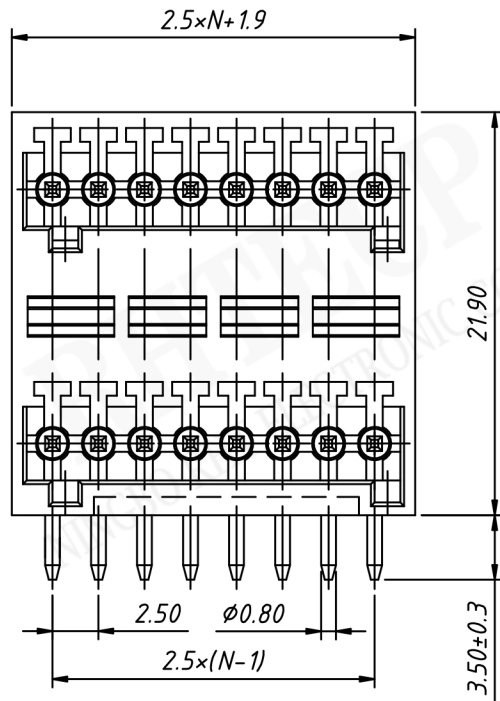

Material
 Housing: PA66, UL94V-0
 Pin header: Brass, Tin plated



Electrical
 Rated voltage: 150V
 Rated current: 5A
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC1250V / 1 min

Mechanical
 Temp. Range: -40 °C ~ +105 °C

Order Information

RE - C - EDAR - 2.50 - XXP - 4 00

RoHS ————
 Terminal Block ————
 Pitch ————
 No.: of Pole ————
 Color: 4- Green ————
 Product Code: 00~99 ————

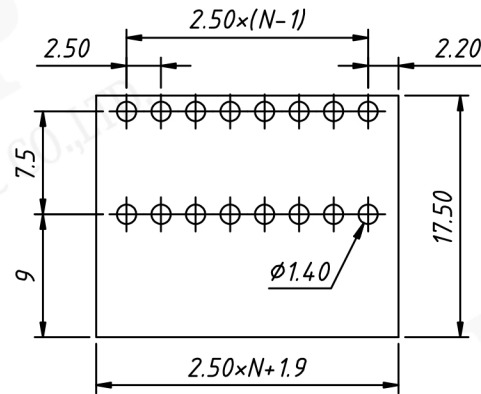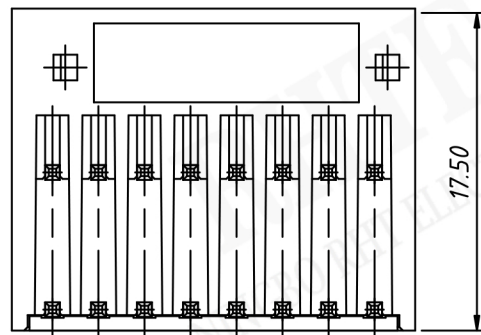

PCB LAYOUT




NINGBO RHT ELECTRONIC CO., LTD

UNITS: mm

SHEET SIZE: A4

SCALE: ---



> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

TERMINAL BLOCK