


Material
Housing: PA66, UL94V-0
Clamp: Phosphor bronze, Tin Plated
Shrapnel: Stainless steel
Screw: M3 Steel, Zn plated
Fix screw: Steel, Zn plated

Electrical
Rated voltage: 300V
Rated current: 8A
Contact Resistance: 20 mΩ
Insulation resistance: 500MΩ/DC500V
Withstand voltage: AC2000V / 1 min
Wire Range: 24 ~ 16AWG 1.0mm²
Mechanical
Temp. Range: -40 °C ~ +105 °C
Strip length: 9 ~ 10mm

Order Information

RE - C - FMEE - 3.50 - XXP - 4 S 00

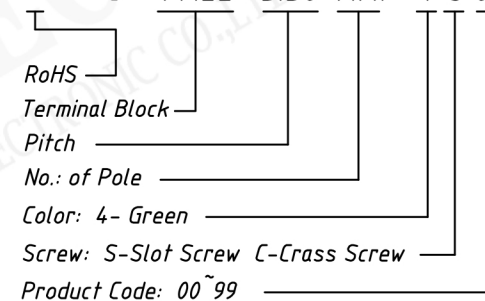

NINGBO RHT ELECTRONIC CO., LTD

UNITS : mm

SHEET SIZE : A4

SCALE : ---



> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

TERMINAL BLOCK