

Material

Housing: PA66, UL94V-0
 Clamp: Phosphor bronze, Ni Plated
 Screws: M2 Steel, Zinc plated
 Cage: Brass, Zn plated
 Slide block: Steel, Zn plated

Electrical


Rated voltage: 300V
 Rated current: 8A
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1 min
 Wire Range: 28~16AWG 1.0mm²

Mechanical

Temp. Range: -40 °C ~ +105 °C
 Strip length: 7mm
 Torque: 0.2Nm(1.8 bin)

Order Information

RE - C - EDKC - 3.81 - XXP - 4 S 00

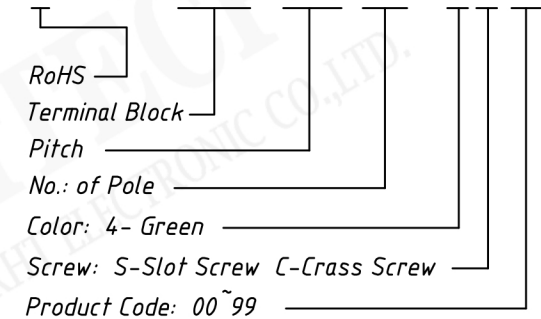

UNITS:mm	SHEET SIZE:A4		SCALE: ---
> 0~3	> 3~18	> 18~50	> 50~120
± 0.12	± 0.15	± 0.3	± 0.5