



Material
 Housing: PA66, UL 94V-0
 Pin header: Brass, Tin plated
 Nut: M2.5, Brass

Electrical
 Rated voltage: 300V
 Rated current: 15A
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1 min




Mechanical
 Temp. Range: -40 °C ~ +105 °C

Order Information

RE - C - EDDL R - 5.08 - XXP - 4 00

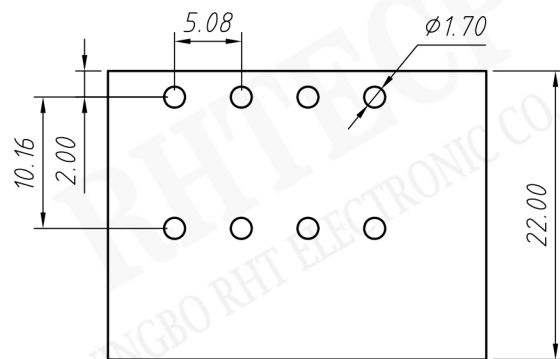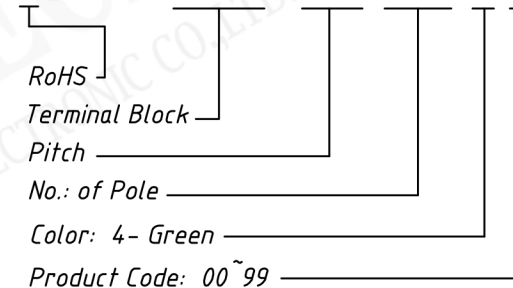

TOLERANCES EXCEPT AS NOTED

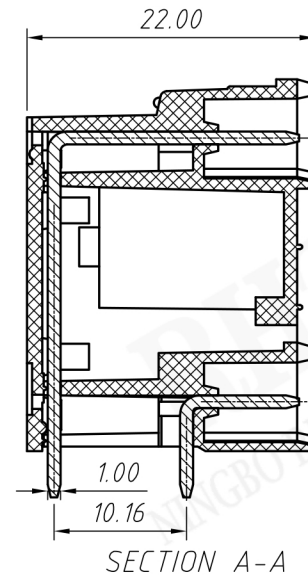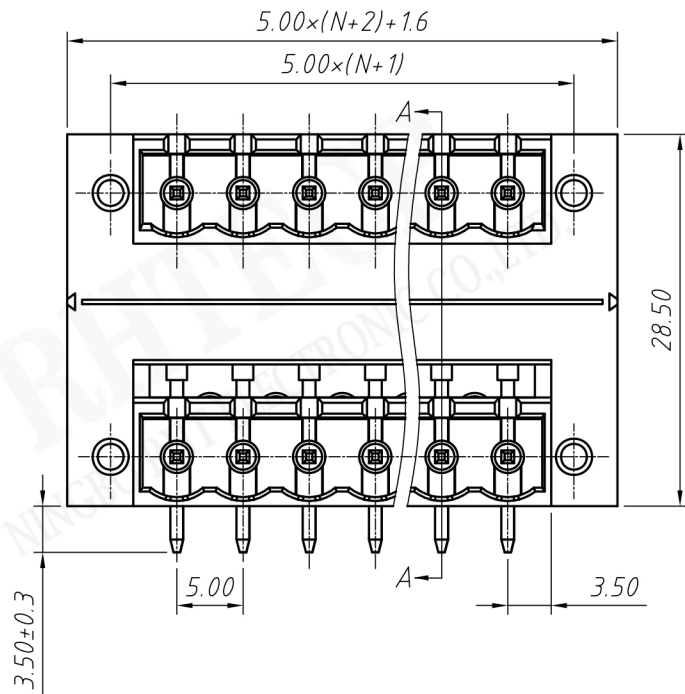

Material
 Housing: PA66, UL 94V-0
 Pin header: Brass, Tin plated
 Nut: M2.5, Brass


Electrical
 Rated voltage: 300V
 Rated current: 15A
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1 min

Mechanical
 Temp. Range: -40 °C ~ +105 °C

Order Information

RE - C - EDDL R - 5.00 - XXP - 4 00

RoHS
 Terminal Block
 Pitch
 No.: of Pole
 Color: 4- Green
 Product Code: 00 ~ 99

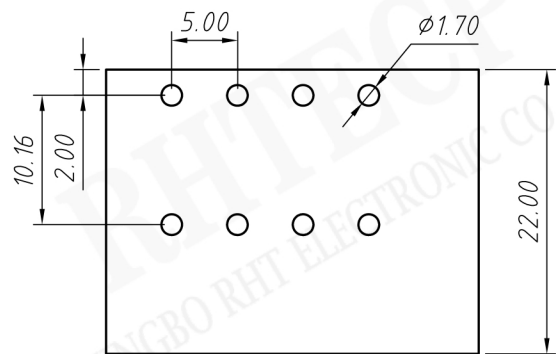

TOLERANCES EXCEPT AS NOTED