


Material
 Housing: PA66, UL94V-0
 Screws: M3 Steel, Zn plated
 Pin header: Brass, Tin plated
 Cage: Brass, Tin plated
 Nut: Brass

Electrical
 Rated voltage: 300V
 Rated current: 15A
 Contact Resistance: 20 m Ω
 Insulation resistance: 500MΩ/DC500V
 Wire range: 28-14 AWG 2.5mm²
 Withstand voltage: AC2000V / 1 min

Mechanical
 Torque: 0.5NM(4.5Lb.in)
 Steip length: 7-8mm
 Temp. Range: -40 °C ~ +105 °C

Order Information

RE - C - UNKM - 5.08 - XXP - 4 S 00

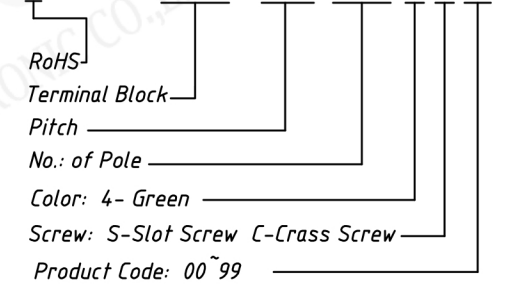

UNITS:mm	SHEET SIZE:A4		SCALE: ---
> 0~3	> 3~18	> 18~50	> 50~120
± 0.12	± 0.15	± 0.3	± 0.5