

PCB LAYOUT

Material

Housing: PA66 , UL94V-0
 Pin header: Brass , Tin plated
 Wire guard: Stainless steel

Electrical


Rated voltage: 300V
 Rated current: 15A
 Wire range: 28 ~ 12AWG 2.5mm²
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1min

Mechanical

Temp. Range: -40 °C ~ +105 °C
 Soldering: 250°C ±5°C for 5S
 Strip length: 5 ~ 6 mm

Order Information

RE - C - 242V-5.00-XXP-1 xx

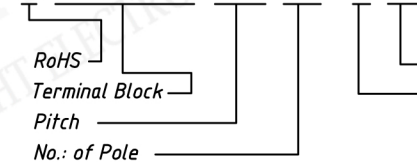

Product Code: 00 ~ 99
 Color: 1-Gray
 5-Orange