



SECTION A-A

Material
 Housing: PA66 , UL94V-0
 Pin header: Brass, Tin plated
 Wire guard: Stainless steel
 Electrical
 Rated voltage: 300V
 Rated current: 8A
 Wire range: 22~16AWG 1.5mm²
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1 min
 Mechanical
 Temp. Range: -40 °C ~ +105 °C
 Soldering: 250°C±5°C for 5S
 Strip length: 9~10mm

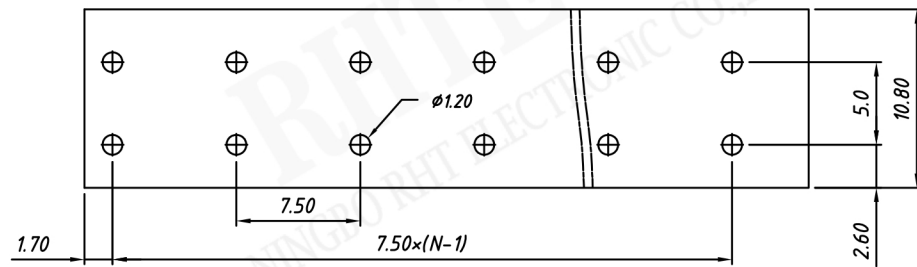

PCB LAYOUT

Order Information

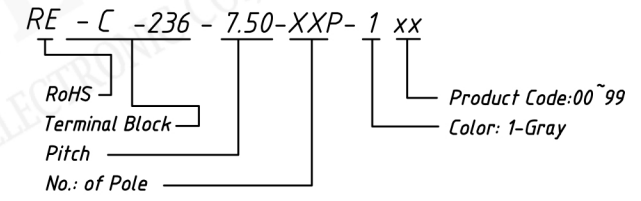

UNITS:mm	SHEET SIZE:A4			SCALE: ---
> 0~ 3	> 3~ 18	> 18~ 50	> 50~ 120	
± 0.12	± 0.15	± 0.3	± 0.5	