

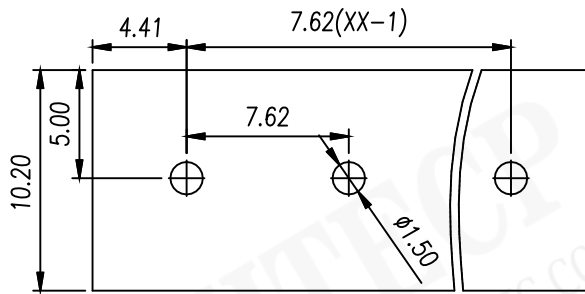
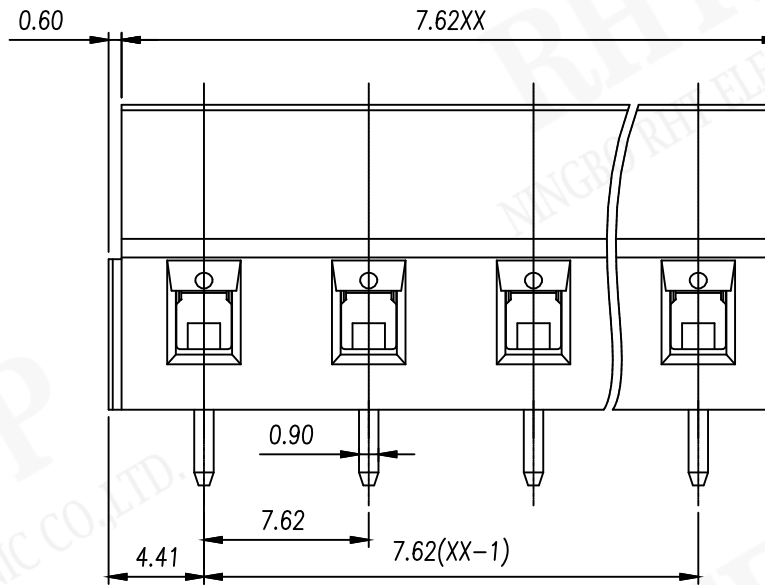



P/N:RE-C-128-7.62-XXP-4S01

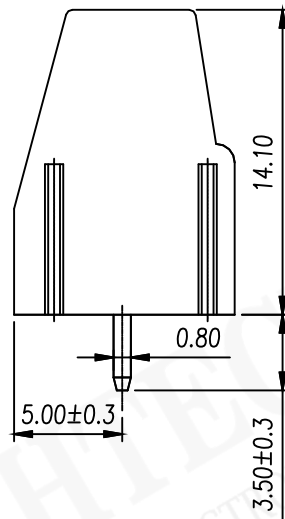

**P.C.B. LAYOUT**

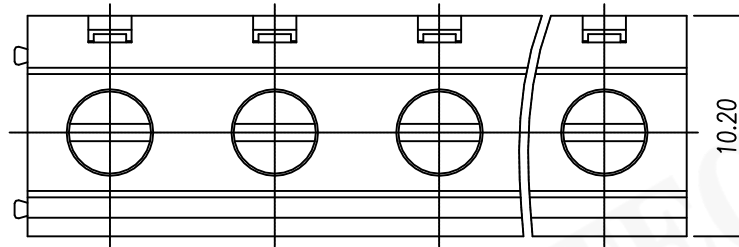

UL/CUL 技术参数		UL/CUL Technical Data			
等级	Use Group	B	C	D	
额定电压	Rated Voltage [V]	300	-	300	
额定电流	Rated Current [A]	16	-	10	
接线范围	Wire Range				22-12
单/多芯线	Solid/Stranded [AWG]				
耐电压	Withstanding Voltage				1600V/1Min
IEC 技术参数		IEC60947-7-4			
IEC Technical Data					
过电压类别	Overvoltage Category	III	III	II	
污染等级	Contamination Class	3	2	2	
额定电压	Rated Voltage [V]	450	630	1000	
额定电流	Rated Current [A]	20	20	20	
额定冲击电压	Impulse withstand voltage [KV]	6.0	6.0	6.0	
导线截面积	Conductor cross section				0.5-2.5
硬质/柔性导线	Solid/flexible [mm <sup>2</sup> ]				
材料		Material			
绝缘材料	Insulation Material	PA66			
阻燃等级	Imflammability	UL94V-0			
导体材料	Contacting Material	铜合金 Copper alloy			
导体表面镀层	Contactive Coating	镀锡 Sn Plated			
一般参数		Other Data			
间距	Pitch /极数 Poles [mm] / [P]	7.62 / 02-24			
剥线长度	Stripping Length [mm]	6-7			
螺丝	Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4			
工作温度	Operating temperature [°C]	-40~105			
焊锡温度	Soldering temperature	260°C/5S			
引针尺寸	Pin Dimensions [mm]	0.8*0.9			
PCB板孔径	PCB Hole Diameter [mm]	Ø1.5			

linear dimension(Tolerances Standard GB/T 14486-2008)									
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

UNITS:mm

SHEET SIZE:A4

SCALE: ---



First angle projection

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

**TERMINAL BLOCK**



NINGBO RHT ELECTRONIC CO.,LTD