


PCB TERMINAL BLOCKS

5mm Pitch Standard Profile Screw Terminal Blocks

- 2 & 3 pole interlocking
- 4-12 pole solid block end stackable
- Guided pin alignment
- Moulded in grey UL94-V0 flame retardant PC
- Wire protector terminals
- 0.5-4.0mm² (30-14AWG) solid cable
- 0.5-2.5mm² (30-14AWG) stranded cable
- Anti solder wicking terminals
-  approved


CTB1000



TYPE NO.	POLES	LENGTH
CTB1000/2	2	10mm
CTB1000/3	3	15mm
CTB1000/4	4	20mm
CTB1000/5	5	25mm
CTB1000/6	6	30mm
CTB1000/7	7	35mm
CTB1000/8	8	40mm
CTB1000/9	9	45mm
CTB1000/10	10	50mm
CTB1000/11	11	55mm
CTB1000/12	12	60mm

SPECIFICATION

Rating	24A/400V UL=16A/300V, VDE&IMQ=24A/450V
Dielectric strength	≥2.5kV
Impulse withstand voltage	4kV
Working temperature	85°C
Moulding	UL94-V0 flame retardant PC
Pin/terminal	Tinned, nickel plated brass
Wire protector	Tinned, nickel plated brass
Screw/torque	M3 steel zinc plated, 0.5Nm
Recommended PCB hole size	ø1.1mm

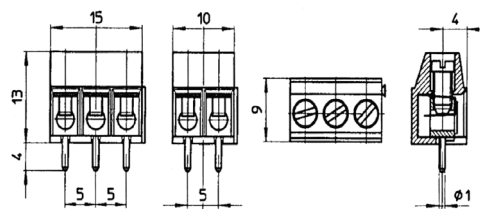

PCB
TERMINAL
BLOCKS

INTER-
CONNECTION

FUSES &
FUSE-
HOLDERS

LEDs &
INDICATORS

MINIATURE
SWITCHES

LIMIT &
SAFETY
SWITCHES

CONTROL
PRODUCTS

INTERFACE
MODULES &
SUPPORTS

RELAY
BASES

DIN RAIL
ENCLOSURES

BATTERIES

SOLAR
PANELS

TRANS-
FORMERS



CAMDENBOSS

We operate a constant improvement policy, our products are subject to change without notice.

Ver 1.1

+44 (0)1638 716101
info@camdenboss.com
www.camdenboss.com



FM 28614 EMS 613558