

PCB TERMINAL BLOCKS

5mm Pitch Low Profile Screw Terminal

- Stainless steel wire protector
- 2-12 pole interlocking
- 16A 250VC rating
- UL & CSA approved
- 1.5mm² cable entry
- Double tongue and groove for stronger interlocking and stability
- Captive screws
- Guided pin alignment
- Anti solder wicking
- Honed pin for smooth PCB insertion
- Test probe facility


CTB5201



TYPE NO.	POLES	LENGTH
CTB5201/2BK	2	10mm
CTB5201/3BK	3	15mm
CTB5201/4BK	4	20mm
CTB5201/5BK	5	25mm
CTB5201/6BK	6	30mm
CTB5201/7BK	7	35mm
CTB5201/8BK	8	40mm
CTB5201/9BK	9	45mm
CTB5201/10BK	10	50mm
CTB5201/11BK	11	55mm
CTB5201/12BK	12	60mm

SPECIFICATION

Rating	16A/240V
Working temperature	-33°C to +125°C
Insulation resistance	≥5MΩ
Dielectric strength	≥2.5kV/60sec
Moulding	UL94-V0 flame retardant PA66
Pin/terminal	Brass, tin plated
Wire clamp	Brass, tin plated
Screw/torque	M3 steel zinc plated, 0.4Nm
Recommended PCB hole size	ø1.1mm

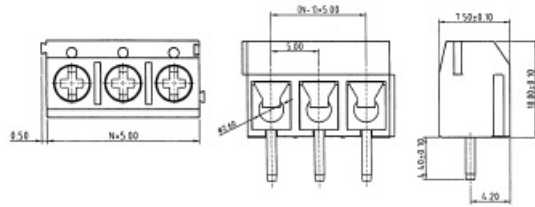

CTB5251/12BK 12 60mm

PCB
TERMINAL
BLOCKS

INTER-
CONNECTION

FUSES &
FUSE-
HOLDERS

LEDs &
INDICATORS

MINIATURE
SWITCHES

LIMIT &
SAFETY
SWITCHES

CONTROL
PRODUCTS

INTERFACE
MODULES &
SUPPORTS

RELAY
BASES

ENCLOSURES

BATTERIES

TRANS-
FORMERS



+44 (0)1638 716101
info@camdenboss.com
www.camdenboss.com

We operate a constant improvement policy,
our products are subject to change without notice.

