


MRT20P6.35-3VE alternative

7.5mm high power vertical rising clamp terminal blocks

Product overview

- 2 and 3 pole double interlocking mechanism for increased strength
- 4-12 pole pre-assembled
- Moulded in green UL94-V0 flame retardant PA66
- Professional rising clamp terminals
- Cable acceptance - 0.13-3.31mm² (26-12AWG)
- Guided pin alignment
- Captive screw

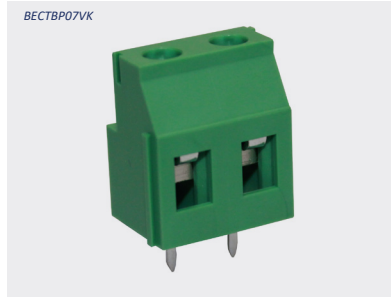

SPECIFICATION	
Rating	UL=20A/300V, IEC=24A/250V
Impulse withstand voltage	2.0kV/1min
Working temperature	-40°C to +105°C
Moulding	UL94-V0 flame retardant PA66
Pin/terminal	Tinned, nickel plated brass
Rising clamp	Tinned, nickel plated brass
Screw/torque	M3 steel zinc plated, 0.5Nm
Recommended PCB hole size	ø1.5mm

PART NO.	POLES	LENGTH
BCEVK/2	2	15mm
BCEVK/3	3	22.5mm
BCEVK/4	4	30mm
BCEVK/5	5	37.5mm
BCEVK/6	6	45mm
BCEVK/7	7	52.5mm
BCEVK/8	8	60mm
BCEVK/9	9	67.5mm
BCEVK/10	10	75mm
BCEVK/11	11	82.5mm
BCEVK/12	12	90mm

