

TOKO #4DFA-1575B-12 alternative

Part Number: BCE52R1575BS10-12


Center Frequency (MHz): 1575.4
 Bandwidth (fo ± MHz): ±5.0
 Insertion Loss (dB) Max.: 1.05
 Ripple in BW (dB) Max.: 0.35
 V.S.W.R. in BW Max.: 1.85:1
 Selectivity (dB) Min. (MHz): 18.4, 21.5 (fo + 140, - 140)



► Electrical Specifications

Item		Specifications
1	Center Frequency (fo)	1575.4MHz
2	Band Width	fo ±5.0[1570.4~1580.4]MHz
3	Insertion Loss In BW	1.05dB Max.
4	Ripple	0.35dB Max
5	V.S.W.R (Ratio)	1.85:1 Max
6	Attenuation (Absolute Value)	21.5dB Min. @ fo - 140.0 MHz
		18.4dB Min. @ fo + 140.0 MHz
7	In/Out Impedance	50Ω
8	Operation Temperature Range	-40 to +85

► Dimensions

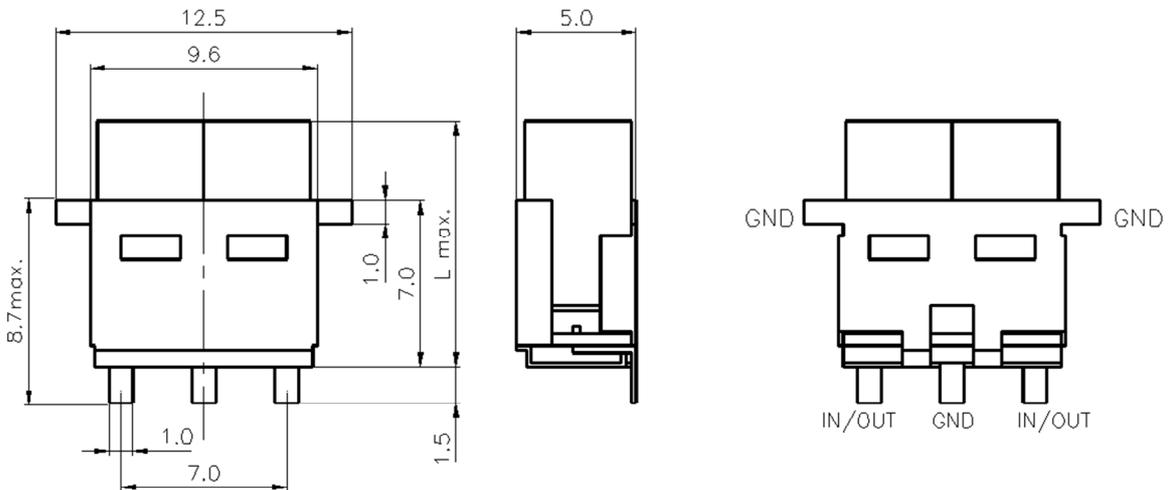

L=12.5mm max.