
UNSPECIFIED SERIES TO SMA (M) CABLE

PART NUMBER DESCRIPTION

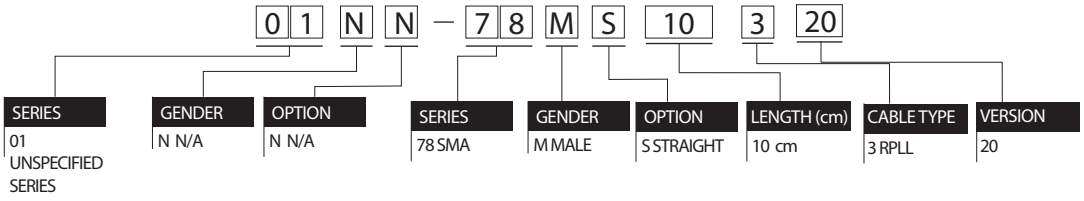

MATERIAL AND FINISH

	DETAIL
CABLE	RPHF
CONNECTOR A	UNSPECIFIED SERIES
CONNECTOR B	SMA MALE

MECHANICAL AND ENVIRONMENTAL


	SPECIFICATIONS
NOMINAL OUTER DIAMETER	5.70 mm
MIN BEND RADIUS	29.2 mm
TEMPERATURE RANGE	-55˚C ~ 135˚C

ELECTRICAL

	TEST CONDITION	SPECIFICATIONS
IMPEDANCE	DC~ 26.5 GHz	50 Ohms
VSWR	DC~ 26.5 GHz	1.3 Max

UNSPECIFIED SERIES TO SMA (M) CABLE

STANDARD DIMENSIONS

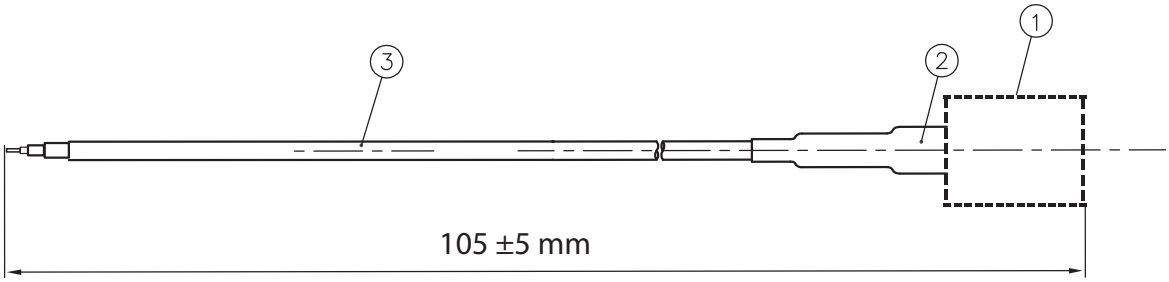

1 SMA (M) CONNECTOR
2 HEAT SHRINK TUBE
3 CABLE

CABLE



Center Conductor	Silver-plated copper wire, standed)	19 / 0.2 mm
Dielectric	Low density PTFE (extruded)	
Inner shield	Silver-plated copper tape	
Outer shield	Silver-plated copper braid	
Jacket	Extruded FEP	5.70 mm

CONNECTOR

SMA (M)

