
1.85mm FEMALE END LAUNCH CONNECTOR

PART NUMBER DESCRIPTION

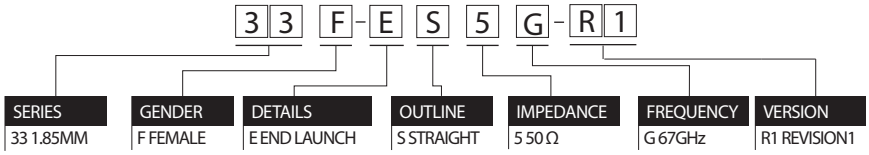


MATERIAL AND FINISH

	MATERIAL	FINISH
CENTER CONTACT	BERYLLIUM COPPER	50µ" GOLD
	BERYLLIUM COPPER	30µ" GOLD
INSULATOR	ULTEM 1000	AMBER
	PTFE	WHITE
OUTER CONTACT	STAINLESS STEEL	PASSIVATED
	BRASS	70µ" NICKEL
BOLT	STAINLESS STEEL	
WASHER	STAINLESS STEEL	

ELECTRICAL

	TEST CONDITION	SPECIFICATIONS
IMPEDANCE	DC ~ 67 GHz	50 Ω
VSWR	DC ~ 67 GHz	1.2 MAX

STANDARD DIMENSIONS

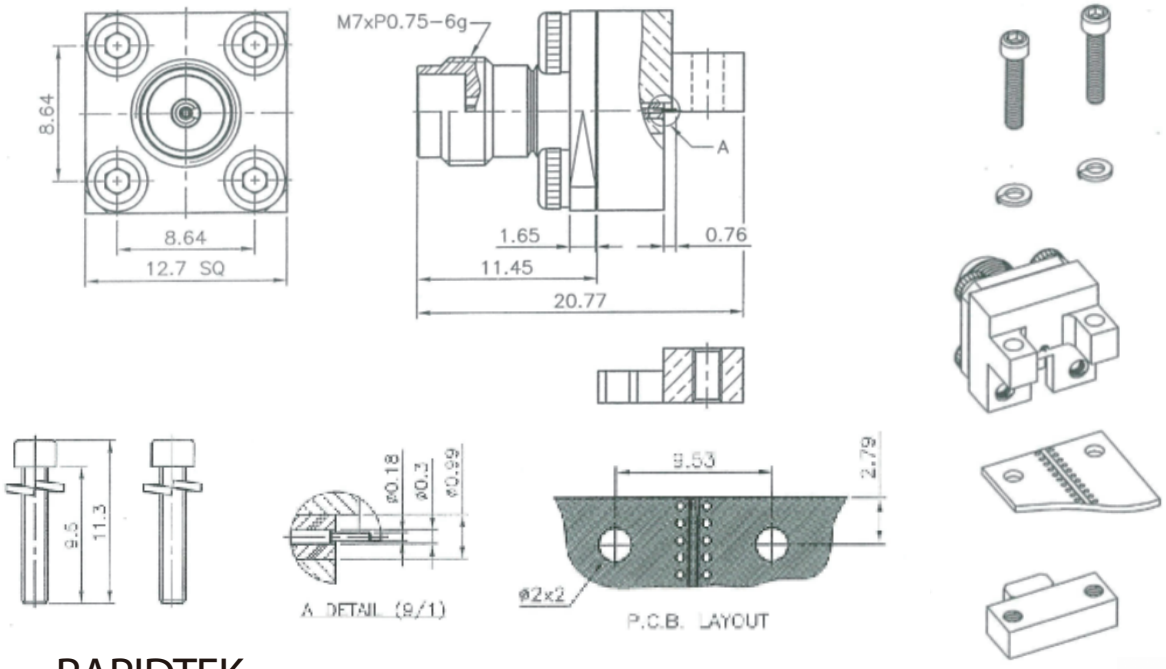

RAPIDTEK
RF COAXIAL PRODUCTS